

Type FCT 1010 + 1350 2 in 1

Robust and maintenance free entry level hot wire cutting table with a cutting width of 1010 or 1350 mm and a height of 240 or 380 mm. Straight as well as angular cuts can be performed quickly and without cumbersome shavings.

You receive two tools in one as the cutting bow is removable and can be used for free handed cutting.



SPECIFICATIONS

- ◆ Tape measure on the base plate
- ◆ Robust cutting bow with wire suspension on both sides as well as a corner connections with braces
- ◆ Angle scales
- ◆ Security Transformer VDE 0570 with thermal fuse:
24 V – 60 VA – 5A or
40 V – 250 VA – 6.2 A
- ◆ Usable standing or flat
- ◆ Removable cutting bow for free-handed cutting
- ◆ CNC-manufactured water-proof base plate
- ◆ Anodized aluminum
- ◆ Includes one replacement wire

TECHNICAL DATA

- ◆ Cutting height: 240 mm (FCT 1010) bzw. 380 mm (FCT 1350)
- ◆ Cutting length: 1010 mm (FCT 1010) bzw. 1350 mm (FCT 1350)
- ◆ Cutting speed depending on density of material (10 cm thickness and 40V transformer): 8 – 15 seconds

POSSIBLE CUTS



PRICES (excluding tax)


- ◆ FCT 1010 24V: 249.90 Euro
- ◆ FCT 1010 40V: 279.90 Euro
- ◆ FCT 1350 40V: 379.90 Euro

PRICES (incl. tax)


- ◆ FCT 1010 24V: 297.38 Euro
- ◆ FCT 1010 40V: 333.08 Euro
- ◆ FCT 1350 40V: 452.08 Euro

ITEM NUMBERS

- ◆ FCT 1010 24V: FCT1010242
- ◆ FCT 1010 40V: FCT1010402
- ◆ FCT 1350 40V: FCT1350402

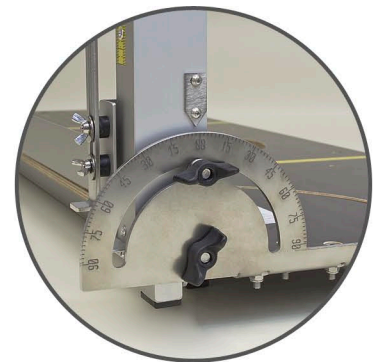


1
Angle cuts can be completed quickly via the angle scales.

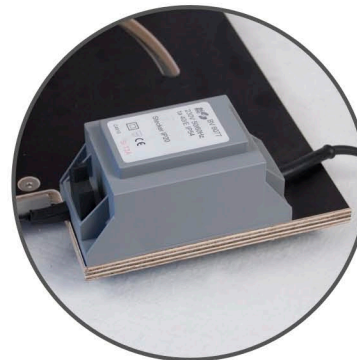

2
The 24V transformer is attached to the base plate. The 40V transformer can be attached to base plate of hung up on scaffolding.



3
An angle can be adjusted quickly on the base plate.

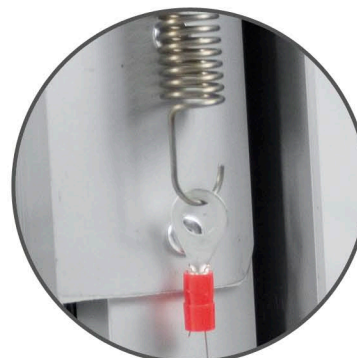

4
The wire suspension with adjustable tension springs allows for easy wire exchange.