

# Type L-G-VH 135R 3 in 1

The L-G-VH 135R is equipped with a work surface with removable catch plate (can be mounted left or right) to prevent material from falling on the floor as well as a fixed transformer. The 90 degree angle scale on the work surface and the vertical angle scale make miter, sloped, angular, and stepped cuts very easy. Tapered cuts are possible through the removable cutting bow. Through the receipts for the cutting wire on the cutting bow vertical 90 degree cuts as well as vertical 45 degree cuts are possible.




## SPECIFICATIONS

- ◆ Tape measure and angle scale on base
- ◆ Removable catch plate
- ◆ Height adjustable and removable cutting arm
- ◆ Security Transformer VDE 0570 with thermal fuse (attached to the tool): 40 V - 250 VA - 6.2 A
- ◆ Wheel for easy transport
- ◆ Use flat or standing up
- ◆ Strong corner connections with braces
- ◆ Ball bearing tracks
- ◆ Anodized aluminum
- ◆ CNC-manufactured water-proof base plate
- ◆ Connection Foot Switch
- ◆ incl. 3 Replacement cutting wires
- ◆ Optional: Integrated stand

## TECHNICAL DATA

- ◆ Cutting height (horizontal): 380 mm
- ◆ Cutting height (vertical): 600 mm
- ◆ Cutting Width: 1350 mm
- ◆ Cutting speed depending on density of material: 100 mm (4 inches) in 8-15 seconds

## POSSIBLE CUTS



## PRICES (excluding tax)

- ◆ 1138.00 Euro
- ◆ 1238.00 Euro (incl. tool stand)


## PRICES (incl. tax)

- ◆ 1354.22 Euro
- ◆ 1473.22 Euro (incl. tool stand)

## ITEM NUMBERS

- ◆ L-G-VH 135R: 0L13540VH3
- ◆ L-G-VH 135R incl. tool stand: 0L13540VHS

**1**  
Angle cuts can be prepared quick and simple.

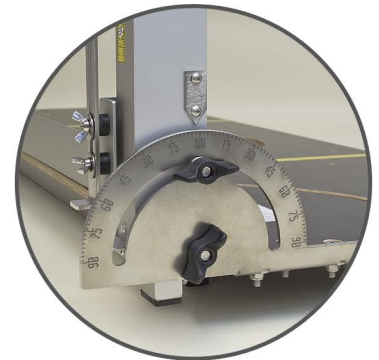

**2**  
Wheels simplify the transport.



**3**  
An angle can be adjusted on the base in seconds.



**4**  
*Optional:*  
The integrated stand allows operators to use the tool anywhere standing up.

